






Kawasaki Brute Force 750i Factory Replacement Air Filter

PART#: OR10539


OTR Air Filters are specifically designed and engineered in order to provide maximum performance and engine protection for your Kawasaki ATV. Positive filter sealing and ultra-high efficiency media ensure that no dust enters your engine.

1. Remove lid from stock air box by loosening the clips.
2. Remove the two screws that hold the stock air filter to the plastic cap. **(Figure 1)**
3. Remove stock air filter and plastic cap. **(Figure 2)**
4. Install the OTR plug into the hole on the plastic cap. Place the cone shape end into the hole first and twist the flat end until the cone shape end is fully secure on the plastic cap. Next, pull on the cone shape end to straighten the plug and fully secure it. **(Figure 3)**
5. Make sure the inside of the stock air box is clean, especially where the new OTR air filter sits.
6. Remove metal screen and install the OTR air filter making sure the OTR air filter sits in between the tabs. The angled end of the OTR filter will be on the top as shown. **(Figure 4)**
7. Install the stock plastic cap with the supplied OTR plug near the clips of the air box securing the OTR air filter to the air box as shown. **(Figure 5)**
8. Tighten the center stock screw. Make sure the angled end of the OTR filter has no gaps between the plastic cap and the OTR Filter.
9. Reinstall and secure the stock lid back on the stock air box and fasten the clips.

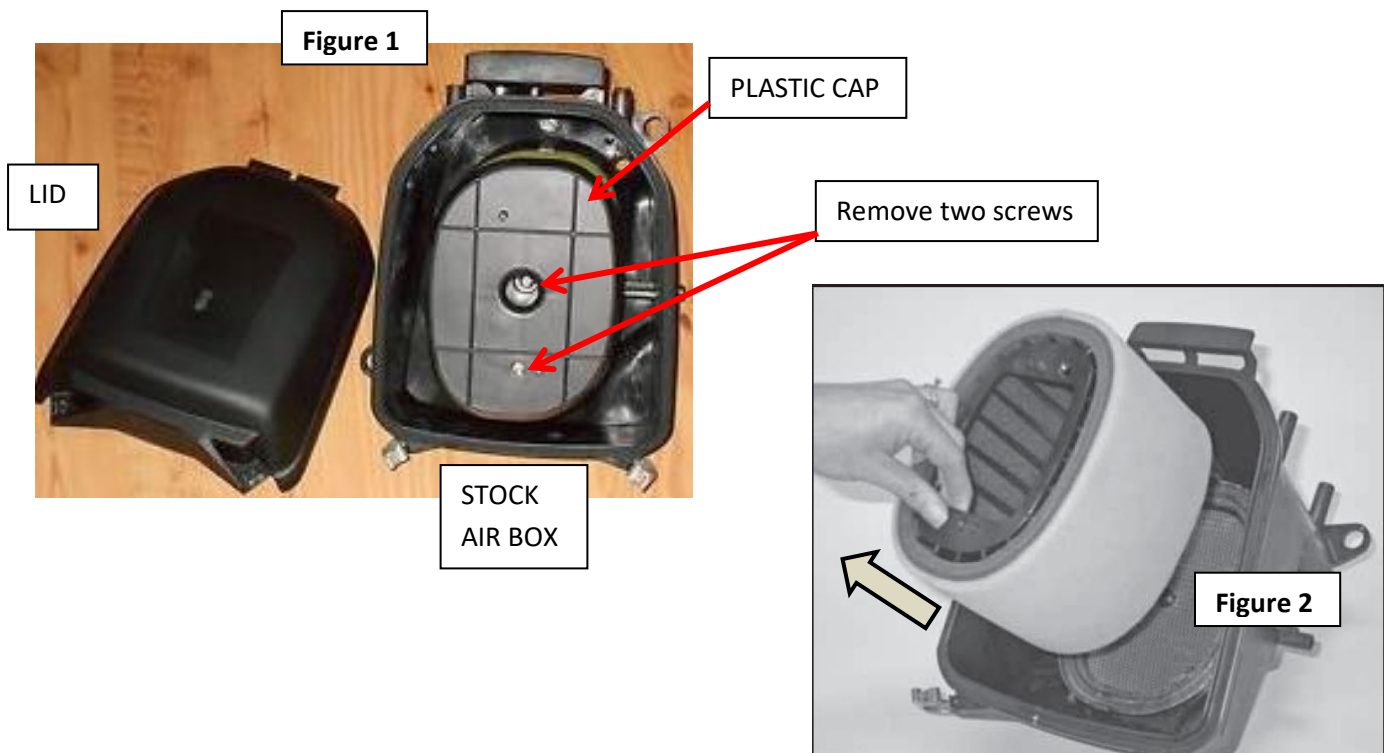

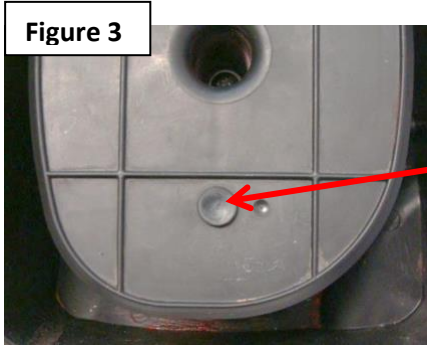

This side up

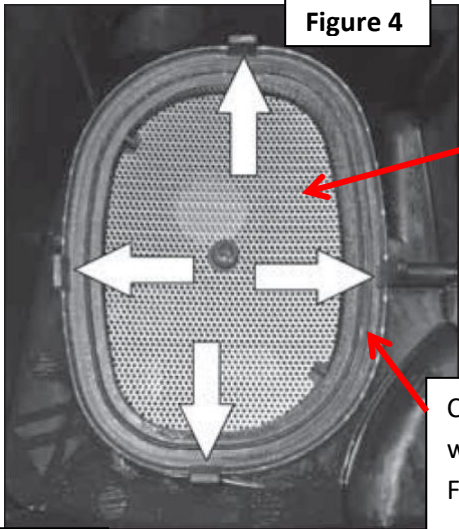

Remove Screen



Clean area where OTR Air Filter will sit



The angled end of the OTR filter will be on the top.



Finally, tighten stock screw

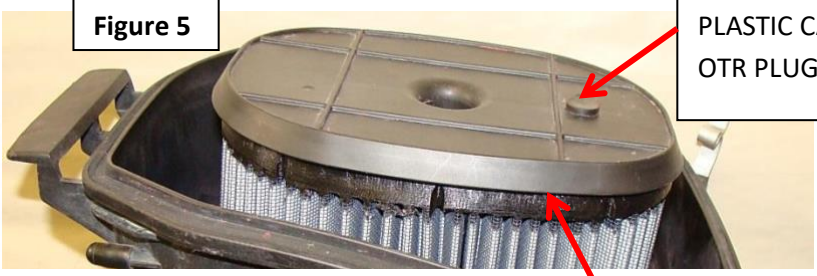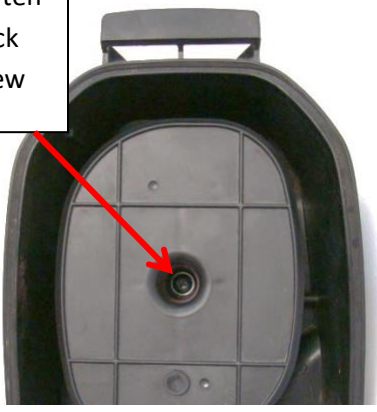

PLASTIC CAP with OTR PLUG installed

No gaps between PLASTIC CAP and OTR FILTER

Never oil an OTR filter as this will only degrade the filter's performance.

OTR FILTERS
605 Tower Road
Mundelein, IL 60060
800-263-8660